


自潤軸承系列


SPB #500SP 自潤襯套 (內徑 Ø6~Ø45)

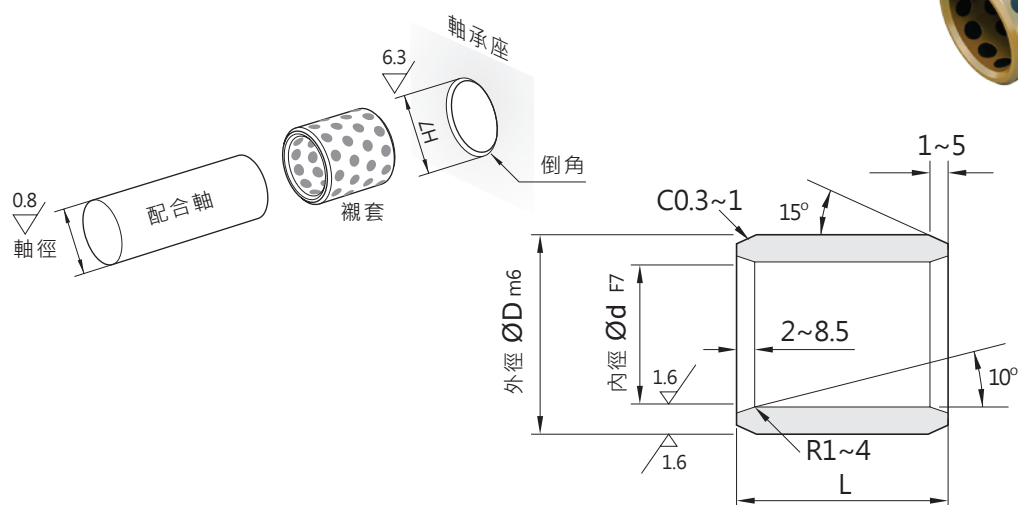

內徑		外徑		長度 L 公差															壓入後 內徑公差	適用墊圈
Ød	公差	ØD	公差	8	10	12	15	16	19	20	25	30	35	40	50	60	70	80		SPW
6	+0.022 +0.010	10	+0.015 +0.006	061008	101610	061012													+0.019 +0.007	0603
8	+0.028 +0.013	12		081208	081210	081212	081215												+0.025 +0.010	0803
10		14	+0.018 +0.007	101408	101410	101412	101415			101420										1003
12		18		121808	121810	121812	121815	121816	121819	121820	121825	121830							+0.031 +0.013	1203
13		19			131910	131912	131915			131920	131925	131930								1303
14		20			142010	142012	142015			142020	142025	142030								1403
15	+0.034 +0.016	21			152110	152112	152115	152116		152120	152125	152130	152135	152140					+0.030 +0.012	1503
16		22			162210	162212	162215	162216	162219	162220	162225	162230	162235	162240						1603
17		23	+0.021 +0.008				172315													1803*
18		24			182410	182412	182415	182416		182420	182425	182430	182435	182440						1803
19		26					192615			192620										2005*
20		28			202810	202812	202815	202816	202819	202820	202825	202830	202835	202840						2005
20		30			203010	203012	203015	203016		203020	203025	203030	203035	203040						2505*
22		32				223212	223215			223220	223225									2505*
25	+0.041 +0.020	33				253312	253315	253316		253320	253325	253330	253335	253340					+0.037 +0.016	2505
25		35				253512	253515	253516		253520	253525	253530	253535	253540						3005*
28		38								283820	283825	283830		283840						3005*
30		38					303812	303815		303820	303825	303830	303835	303840						3005
30		40	+0.025 +0.009			304012	304015			304020	304025	304030	304035	304040						3505*
31.5		40										314030		314040						3505*
32		42								324220		324230		324240						3505*
35		44								354420	354425	354430	354435	354440					+0.046 +0.021	3505
35		45								354520	354525	354530	354535	354540						4007*
38		48												384840						4007*
40	+0.050 +0.025	50					405015			405020	405025	405030	405035	405040						4007
40		55					405515					405530	455535	405540						4507*
45		55	+0.030 +0.011									455530	455635	455540					+0.045 +0.020	4507
45		56										455630	456035	445640						4507
45		60										456030	456035	456040	450650	456060	456070	456080		4507

自潤軸承系列


SPB #500SP 自潤襯套 (內徑 Ø50~Ø200)

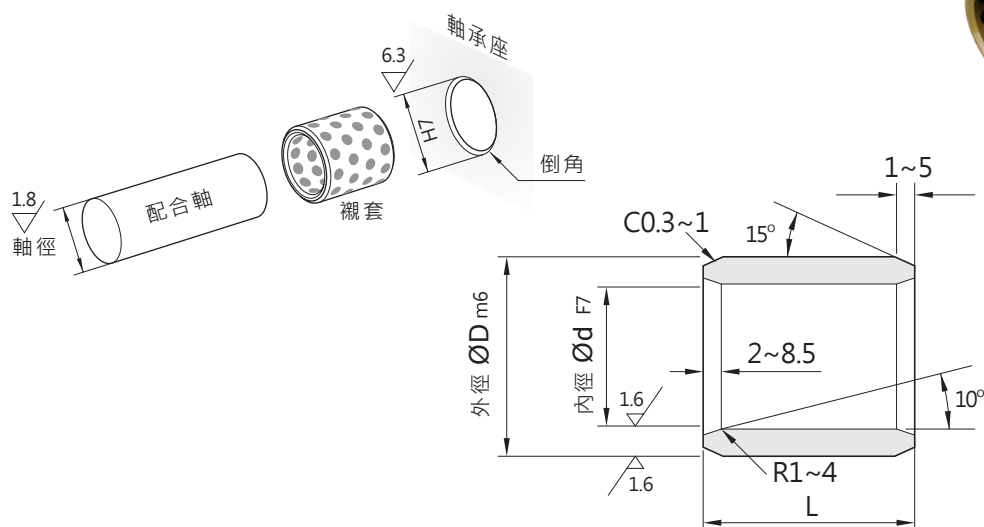

內徑		外徑		長 度 L 公差														壓入後 內徑公差	適用墊圈
ød	公差	øD	公差	20	30	35	40	50	60	70	80	90	100	120	130	140	150	200	SPW
50		60		506020	506030	506035	506040	506050	506060	506070	506080								5008
50	+0.050 +0.025	62			506230	506235	506240	506250	506260	506270	506280							+0.045 +0.020	5008
50		65			506530		506540	506550	506560	506570	506580		5065100						5008
55		70	+0.030 +0.011		557030	557035	557040	557050	557060	557070									5508
60		74			607430	607435	607440	607450	607460	607470	607480								6008
60		75			607530	607535	607540	607550	607560	607570	607580		6075100					+0.055 +0.025	6008
63		75							637560	637570	637580								6508*
65		80					658040	658050	658060	658070	658080								6508
70	+0.060 +0.030	85			708530	708535	708540	708550	708560	708570	708580		7085100						7010
70		90						709050	709060	709070	709080								7010
75		90						759050	759060	759070	759080		7590100					+0.054 +0.024	7510
75		95							759560	759570	759580		7595100						7510
80		96	+0.035 +0.013				809640	809650	809660	809670	809680		8096100	8096120					8010
80		100					8010040	8010050	8010060	8010070	8010080		80100100	80100120		80100140			8010
85		100							8510060		8510080								9010*
90		110						9011050	9011060		9011080	9011090	90110100	90110120				+0.065 +0.030	9010
100	+0.071 +0.036	120					10012050	10012060	10012070	10012080	10012090	100120100	100120120		120140140				10010
110		130						11013050		11013070	11013080		110130100	110130120				+0.064 +0.029	12010*
120		140							12014070	12014080	12014090	120140100	120140120		120140140				12010
125		145										125145100	125145120						-
130		150	+0.040 +0.015								13015080		130150100		130150130				12010
140		160											140160100			140160140			12010
150	+0.083 +0.043	170								15017080		150170100				150170150		+0.076 +0.036	12010
160		180								16018080		160180100				160180150			12010
170		190										170190100				170190150			12010
180		200	+0.046 +0.017										180200100				180200150		12010
190		210											190210100				190210150		12010
200	+0.096 +0.050	230														200230150	200230200	+0.088 +0.042	12010

自潤軸承系列

SPF #500SP 自潤凸緣襯套

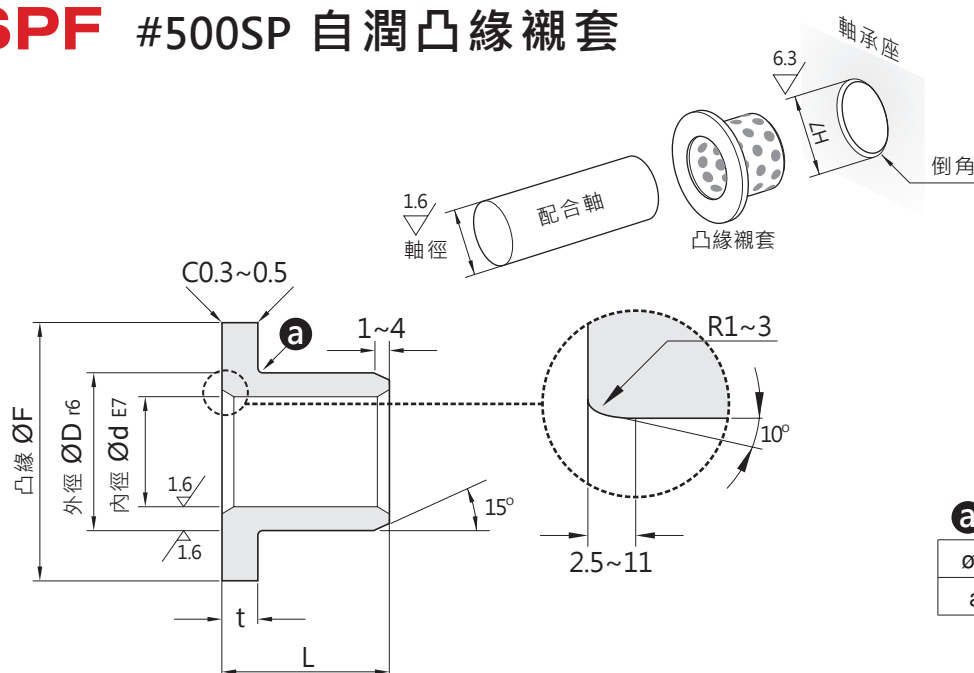

a 凸緣下端倒角


Ød	~16	~55	160
a	R0.3mm	R0.5mm	R1.0mm

內徑		外徑		凸 緣			長 度 L 公差																	壓入後 內徑公差	
ød	公差	ØD	公差	øF	t	公差	10	12	15	17	18	20	23	25	30	35	40	50	60	67.5	80	100	120		
6	+0.032 +0.020	10	+0.028 +0.019	16	2	0 -0.1	0610	0612																+0.016 +0.004	
8	+0.040 +0.025	12	+0.034 +0.023	20			081	0812	0815																+0.021 +0.006
10		14		22			1010	1012	1015	1017		1020													+0.031 +0.013
12	+0.050 +0.032	18		25		1210	1212	1215			1220		1225	1230											+0.028 +0.008
13		19	26		1310	1312	1315			1320		1325	1330												
14		20	27	3			1415			1420		1425													
15		21	28			1510	1512	1515			1520		1525	1530											
16		22	29				1612	1615		1618	1620	1623	1625	1630	1635	1640									
18		24	32					1815		1820		1825	1830	1835	1840										
20	+0.061 +0.040	30	+0.041 +0.028	40	5				2015		2020		2025	2030	2035	2040								+0.037 +0.016	
25		35		45					2515		2520		2525	2530	2535	2540	2550								+0.032 +0.011
30		40		50							3020		3025	3030	3035	3040	3050								
31.5	+0.075 +0.050	40	+0.050 +0.034	50							3120			3130	3135	3140									+0.046 +0.021
35		45	60							3520		3525	3530	3535	3540	3550									
40		50	65						4020		4025	4030	4035	4040	4050										
45		55	70									4530	4535	4540	4550	4560							+0.040 +0.015		
50		60	+0.060 +0.041	75								5030	5035	5040	5050	5060									
55	+0.090 +0.060	65	+0.062 +0.043	80	7.5												5540		5560					+0.055 +0.025	
60		75		90											6040	6050	6060		6080					+0.046 +0.016	
63		75		85																					+0.053 +0.023
65		80		95															6560	6367					
70		85		105														7050			7080				
75	90	+0.073 +0.051	110	10													7560						+0.068 +0.028		
80	100		120														8060		8080	80100					
90	+0.107 +0.072	110	+0.076 +0.054		130														9060		9080			+0.060 +0.025	
100		120			150															10080	100100				
120		140	+0.088 +0.063		170																12080	120100		+0.052 +0.017	
130	+0.125 +0.085	150	+0.090 +0.065	180	10															*13080	*130100			+0.065 +0.025	
140		160		190																	*14080	*140100			
150		170		+0.093 +0.068		200																*150100	*150120		
160		180				210																	*160100		*160120

自潤軸承系列

SPW #500SP 自潤墊圈

(可與 SPB 合併使用)

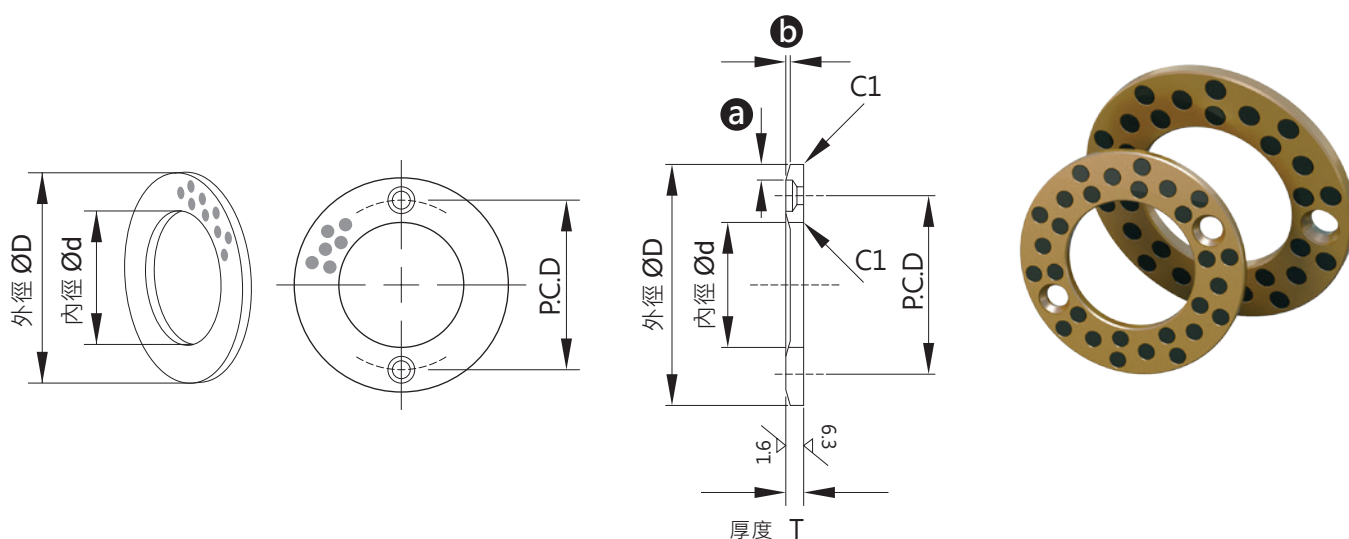

a 內外徑端面倒角

Ød	~10.2	~18.2	~35.2	~45.2	~55.3	~100.5	120.5
a	1.5mm	2.0mm	2.5mm	3.0mm	4.0mm	5.0mm	4.0mm

b 內外徑端面倒角



Ød	~10.2	~18.2	~35.2	~45.2	~55.3	~100.5	120.5
b	0.3mm	0.4mm	0.4mm	0.5mm	0.6mm	0.8mm	0.8mm

Parts No. 型號	內徑		外徑	厚 度		裝 配 孔		
	ød	公差	øD	T	公差	P.C.B	個數	螺栓
SWP- 0603	6.2	+0.2 -0.1	25	3	0 -0.1	15	2	M3
SWP- 0803	8.2		28			18		
SWP- 1003	10.2		30			20		
SWP- 1203	12.2		40			28		
SWP- 1203N	12.2					無埋頭螺栓孔		
SWP- 1303	13.2					28	2	M3
SWP- 1403	14.2			28				
SWP- 1503	15.2			35				
SWP- 1603	16.2		35					
SWP- 1603N	16.2		50	無埋頭螺栓孔				
SWP- 1803	18.2			35		2	M3	
SWP- 2005	20.2			35				
SWP- 2505	25.2		55	40		2	M5	
SWP- 2505N	25.2			無埋頭螺栓孔				
SWP- 3005	30.2		60	45		2	M5	
SWP- 3005N	30.2			無埋頭螺栓孔				
SWP- 3505	35.2		70	50		2	M5	
SWP- 4007	40.2		80	60				
SWP- 4507	45.2		90	70				M6




Parts No. 型號	內徑		外徑	厚 度		裝 配 孔		
	ød	公差	øD	T	公差	P.C.B	個數	螺 栓
SWP- 5008	50.3	+0.3 -0.1	100	8	0 -0.1	75	4	M8
SWP- 5508	55.3		110			85		
SWP- 6008	60.3		120			90		
SWP- 6508	65.3		125			95		
SWP- 7010	70.3		130	10		100	4	M10
SWP- 7510	75.3		140			110		
SWP- 8010	80.3		150			120		
SWP- 9010	90.3		170			140		
SWP- 10010	100.3		190			160		
SWP- 12010	120.3		200			175		

自潤軸承系列

SFP #500SP 自潤平面滑板

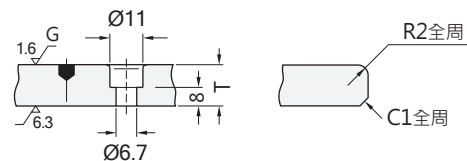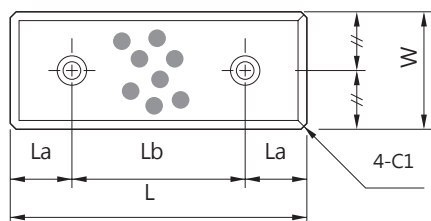




Parts No. 型號	寬度	長度	厚度		裝配孔之孔距		定裝螺栓	
	W	L	T	公差	La	Lb	種類	個數
SFP-1875	18	75	10	+0.04 +0.01	15	45	M6 內六角型	2
SFP-18100		100			25	50		
SFP-18125		125				75		
SFP-18150		150				100		
SFP-2875	28	75			15	45		
SFP-28100		100			25	50		
SFP-28125		125				75		
SFP-28150		150				100		
SFP-3875	38	75			15	45		
SFP-38100		100			25	50		
SFP-38125		125				75		
SFP-38150		150				100		
SFP-4875	48	75			15	45		
SFP-48100		100			25	50		
SFP-48125		125				75		
SFP-48150		150				100		

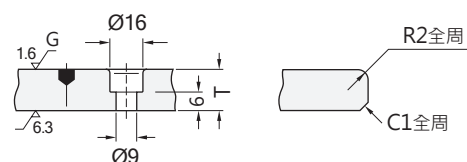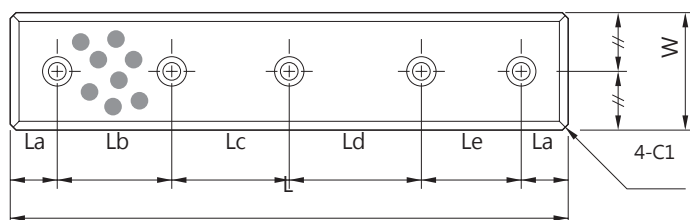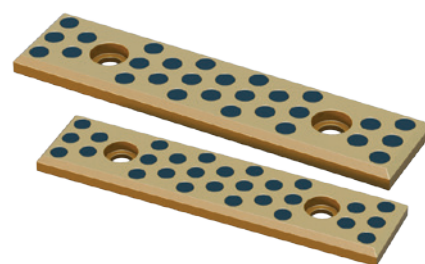

Parts No. 型號	寬度	長度	厚度		裝配孔之孔距					定裝螺栓	
	W	L	T	公差	La	Lb	Lc	Ld	Le	種類	個數
SFP-35100	35	100	10	±0.025	20	60				M8 扁平頭小螺栓	2
SFP-35150		150				55	55				3
SFP-35200		200					50	55			4
SFP-35250		250				70	70	70			4
SFP-35300		300				65	65	65	65		5
SFP-35350		350				80	75	75	80		5
SFP-50100	50	100				60					2
SFP-50150		150				55	55				3
SFP-50200		200					50	55			4
SFP-50250		250				70	70	70			4
SFP-50300		300				65	65	65	65		5
SFP-50400	75	400				90	90	90	90		5
SFP-75150		150				110				M8 扁平頭小螺栓	4
SFP-75200		200				80	80				6
SFP-75250		250				105	105				6
SFP-75300		300				85	90	85			8
SFP-75400		400				120	120	120			8
SFP-75500		500				115	115	115	115		10

自潤軸承系列


FWP #500F 自潤耐磨板(廣泛應用型)

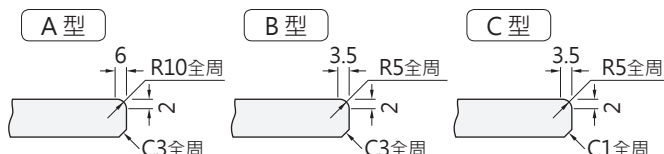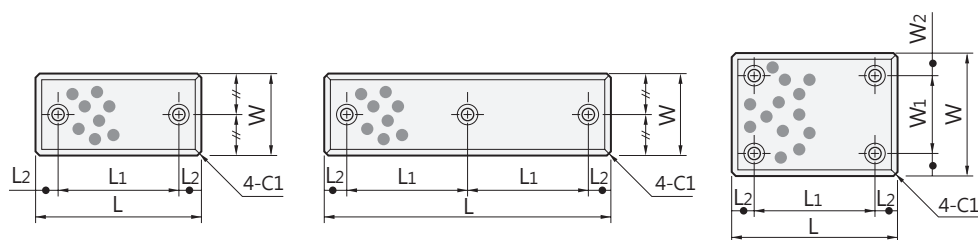

Parts No. 型號	寬度		長度		厚度		裝配孔之孔距						裝配孔數	倒角形狀	
	W	公差	L	公差	T	公差	W1	公差	W2	L1	公差	L2			
FWP- 2875	28	-0.1 -0.3	75	-0.1 -0.3	20	±0.01	-	-	-	45	±0.2	15	2	C	
FWP- 28100			100				-	-	-	50		25			
FWP- 28125			125				-	-	-	75					
FWP- 28150			150				-	-	-	100					
FWP- 28200			200				-	-	-	150					
FWP- 3875	38		75				-	-	-	45		15			25
FWP- 38100			100				-	-	-	50					
FWP- 38125			125				-	-	-	75					
FWP- 38150			150				-	-	-	100					
FWP- 38200			200				-	-	-	150					
FWP- 4875	48		75				-	-	-	45		15	25	2	
FWP- 48100			100				-	-	-	50					
FWP- 48125			125				-	-	-	75					
FWP- 48150			150				-	-	-	100					
FWP- 48200			200				-	-	-	100		50			
FWP- 48200A			200				-	-	-	150		25			
FWP- 48250			250				-	-	-	100		3			
FWP- 5875			75				-	-	-	45		15			
FWP- 58100	58		100				-	-	-	50		2			
FWP- 58150			150				-	-	-	100					
FWP- 7575B	75		75				-	-	-	25			25	4	
FWP- 75100B			100				-	-	-	50					
FWP- 75125			125				-	-	-	75					
FWP- 75150			150				-	-	-	100					
FWP- 75200			200				-	-	-	150					
FWP- 100100	100		100				50	±0.2	25	50					25
FWP- 100125			125							75					
FWP- 100150			150							100					
FWP- 100200			200							150					
FWP- 100250			250							200					
FWP- 125125	125		125				75		75	3.75		75	4		
FWP- 125125A			125				50		75						
FWP- 125150			150						100						
FWP- 125200			200						150						
FWP- 125250			250						200						
FWP- 150150			150						100			100			
FWP- 150200	200		150												
FWP- 150250	250		200												

自潤軸承系列

80B 自潤襯套

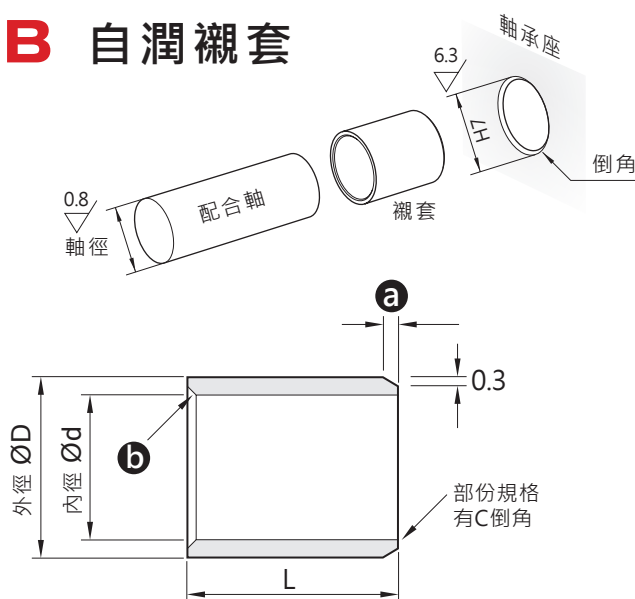

a 外徑倒角

Ød	~6	~35	~50
a	--- mm	1.8mm	2.0mm

a 外徑倒角

Ød	~6	~35	~50
a	0.3mm	0.5mm	註一

(註一) 80B-0605 : 0.5 80B-0406 = 0.5

b 內徑倒角

Ød	~10	~35	~40	~50
c	C0.3mm	R0.4mm	R0.6mm	R0.8mm

#80 自潤襯套為射出成形品。




內徑公差是壓入 ØD±0.002 的環規所測數值。

在 0°C 以下使用時，會因熱收縮而使襯套脫落，所以必須要設防止脫落。

軸徑		軸承座 H7		內徑		外徑		長 度 L 公差													
尺寸	公差	尺寸	公差	ød	公差	øD	公差	2	3	4	5	6	8	10	12	15	20	25	30	40	50
2	0 -0.010	4	+0.012 0	2	+0.065 +0.015	4	+0.107 +0.032	0202	0203	0204											
3		5		3	+0.080 +0.030	5			0303	0304	0305	0306									
4	0 -0.012	6		4	+0.095 +0.045	6		+0.157 +0.045		0403	0404	0405	0406								
5		7	5	+0.095 +0.045		7			0503	0504	0505	0506	0508								
6		8	6	+0.095 +0.045		8				0604	0605	0606	0608	0610							
7	0 -0.015	9	+0.015 0	7	+0.120 +0.060	9	+0.193 +0.058				0705	0706	0708	0710							
8		10		8		+0.120 +0.060		10				0805	0806	0808	0810	0812	0815				
9		11		9		+0.120 +0.060		11				0905	0906		0910	0912	0915				
10	0 -0.018	12	+0.018 0	10	+0.170 +0.090	12	+0.231 +0.081				1005	1006	1008	1010	1012	1015	1020				
12		14		12		+0.170 +0.090		14				1206	1208	1210	1212	1215	1220				
14		16		14		+0.170 +0.090		16						1410	1412	1415	1420				
15	0 -0.021	17	+0.021 0	15	+0.215 +0.115	17	+0.290 +0.095							1510	1512	1515	1520	1525			
16		18		16		+0.215 +0.115		18						1610	1612	1615	1620	1625			
18		20		18		+0.215 +0.115		20						1810	1812	1815	1820	1825			
20	0 -0.025	23	+0.025 0	20	+0.235 +0.135	23	+0.340 +0.115									2015	2020	2025			
22		25		22		+0.235 +0.115		25								2220					
24		27		24		+0.235 +0.115		27								2415	2420	2425			
25	0 -0.025	28	+0.025 0	25	+0.245 +0.125	28	+0.350 +0.125									2515	2520	2525			
28		32		28		+0.245 +0.125		32								2820	2825				
30		34		30		+0.245 +0.125		34									3020	3025	3030	3040	
32	0 -0.025	36	+0.025 0	32	+0.255 +0.135	36	+0.360 +0.135									3220		3230	3240		
35		39		35		+0.255 +0.135		39								3520	3525	3530	3540		
38		42		38		+0.255 +0.135		42								3820		3830	3840		
40	0 -0.025	44	+0.025 0	40	+0.265 +0.145	44	+0.370 +0.145									4020		4030	4040	4050	
45		50		45		+0.265 +0.145		50								4520		4530	4540	4550	
50		55		+0.030 0		50		+0.265 +0.145	55	+0.430 +0.130							5020		5030	5040	5050

自潤軸承系列

80F 自潤凸緣襯套

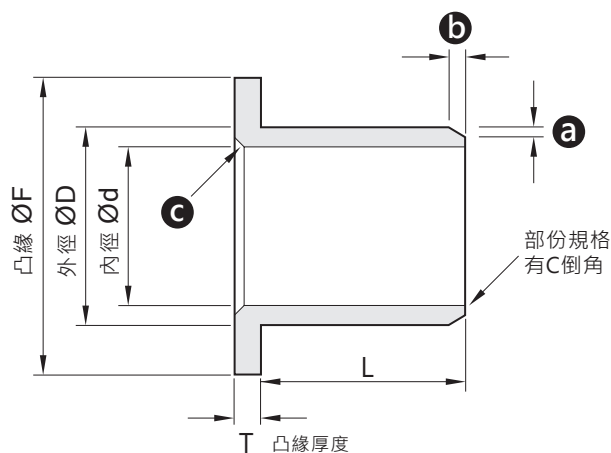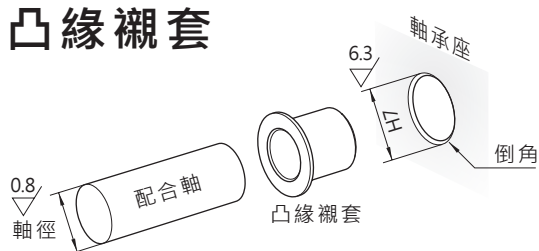

a b 外徑倒角

Ød	2	~35	~50
a	0.5mm	0.8mm	1.0mm
b	*註一	1mm	2mm

(註一) L 2mm : 0.3 L 3/4mm : 0.5

c 內徑倒角

Ød	~10	~35	~40	~50
c	C0.3mm	R0.4mm	R0.6mm	R0.8mm

#80 自潤襯套為射出成形品。



內徑公差是壓入 ØD±0.002 的環規所測數值。

在 0°C 以下使用時，會因熱收縮而使襯套脫落，所以必須要設防止脫落。

內徑		外徑		凸 緣			長 度 L 公差														
Ød	公差	ØD	公差	ØF	T	公差	2	3	4	5	6	7	8	10	12	15	20	25	30	40	50
2	+0.065 +0.015	4		6			0202	0203	0204												
3	+0.080 +0.030	5	+0.107 +0.032	8				0303	0304	0305	0306										
4		6		9				0403	0404	0405	0406										
5	+0.095 +0.045	7		10				0503	0504	0505	0506	0507									
6		8	+0.157 +0.045	12				0603		0605	0606		0608	0610							
7		9		13				0703		0705		0707		0710							
8		10		15	1	0 -0.10		0803		0805	0806		0808	0810	0812	0815					
9		11		16				0903		0905	0906			0910	0912	0915					
10		12		18				1003		1005	1006			1010	1012	1015	1020				
12	+0.120 +0.060	14	+0.193 +0.058	20							1206			1210	1212	1215	1220				
14		16		22										1410	1412	1415	1420				
15		17		23										1510	1512	1515	1520	1525	1530		
16		18		24										1610	1612	1615	1620	1625	1630		
18		20	+0.221 +0.071	26										1810	1812	1815	1820	1825	1830		
20	+0.145 +0.075	23		31	1.5									2010	2012	2015	2020	2025	2030		
22		25	+0.231 +0.081	33										2210		2215	2220	2225	2230		
25	+0.170 +0.090	28		36										2510	2512	2515	2520	2525	2530		
30		34		42										3010	3012		3020	3025	3030	3040	
32		36		46													3220	3225	3230	3240	
35	+0.215 +0.115	39		49	2	0 -0.15								3510	3512		3520	3525	3530	3540	
38		42		52													3820		3830	3840	
40		44	+0.340 +0.115	54											4012		4020	4025	4030	4040	4050
45	+0.235 +0.135	50		60	2.5												4520	4525	4530	4540	4550
50		55	+0.430 +0.130	65													5020		5030	5040	5050

自潤軸承系列

LFB DRYMET LF 自潤襯套 (內徑 Ø3~Ø28)

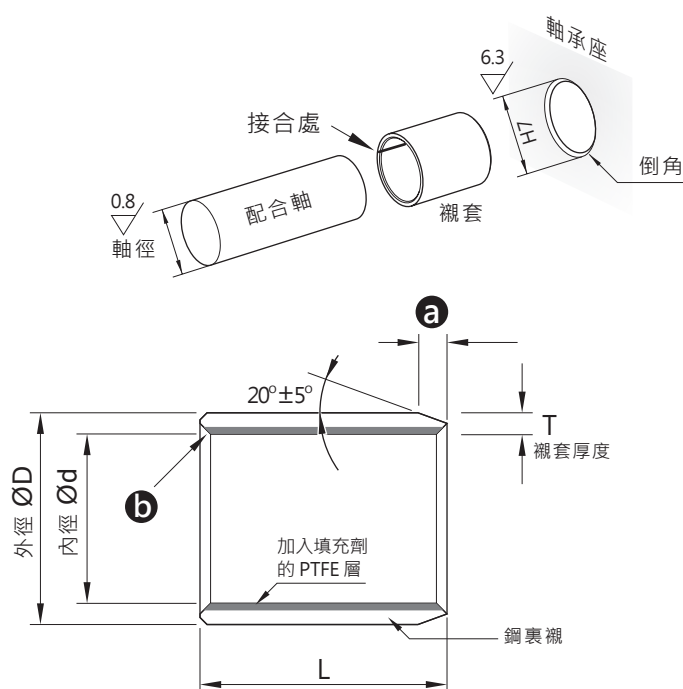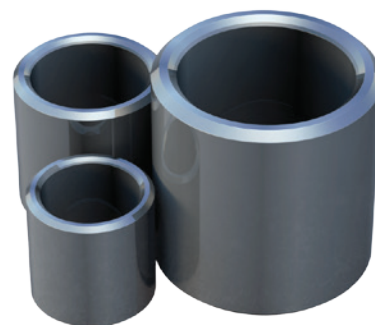

a 外徑倒角 內徑Ø10以上

T	2.0	2.5
a	1.0mm	1.0mm

b 外徑倒角 內徑Ø10以上



T	2.0	2.5
b	C0.5mm	C0.5mm

* 接合處雖然不影響, 軸承旋轉, 但壓入時避免承受最大負荷之位置。

軸徑		軸承座 H7		內徑		外徑		襯套厚度		長 度 L 公差															壓入後 內徑公差
尺寸	公差	尺寸	公差	Ød	公差	ØD	公差	T1	公差	3	4	5	6	7	8	10	12	14	15	16	20	25	30	35	
3	-0.025 -0.034	5	$+0.012$ 0	3	5	$+0.047$ $+0.017$				0303	0304	0305	0306												$+0.062$ 0
4		6		4	6					0403	0404	0405	0406		0408										
5	-0.025 -0.037	7		5	7					0503	0504	0505	0506		0508										
6		8	$+0.015$ 0	6	8	$+0.055$ $+0.025$				0603	0604	0605	0606	0607	0608	0610	0612								$+0.065$ 0
7		9		7	9							0705	0706	0707	0708	0710	0712								
8	-0.025 -0.040	10		8	10							0805	0806	0807	0808	0810	0812		0815						
9		11		9	11								0906			0910									
10		12		10	12	$+0.060$ $+0.030$		1.0	0 -0.025				1006	1007	1008	1010	1012		1015		1020				
12		14		12	14								1206		1208	1210	1212		1215		1220				
13		15	$+0.018$ 0	13	15										1308	1310	1312		1315		1320				$+0.068$ 0
14		16		14	16	$+0.066$ $+0.035$									1408	1410	1412	1414	1415	1416	1420				
15	-0.025 -0.043	17		15	17										1508	1510	1512		1515		1520	1525			
16		18		16	18	$+0.070$ $+0.035$										1610	1612		1615		1620	1625			
17		19		17	19											1710			1715						$+0.071$ 0
18		20		18	20	$+0.075$ $+0.040$										1810	1812		1815		1820	1825	1830		
19		22		19	22											1910			1915		1920				
20		23	$+0.021$ 0	20	23			1.5								2010	2012		2015		2020	2025	2030		
22		25		22	25	$+0.080$ $+0.045$										2210	2212		2215		2220	2225	2230		
24	-0.025 -0.046	27		24	27				0 -0.003										2415		2420	2425	2430		
25		28		25	28	$+0.085$ $+0.050$										2510	2512		2515		2520	2525	2530	2535	
26		30		26	30														2615		2620	2625	2630		
28		32	$+0.025$ 0	28	32	$+0.090$ $+0.050$		2.0									2812		2815		2820	2825	2830		$+0.085$ 0

自潤軸承系列

LFB DRYMET LF 自潤襯套 (內徑 Ø30~Ø160)

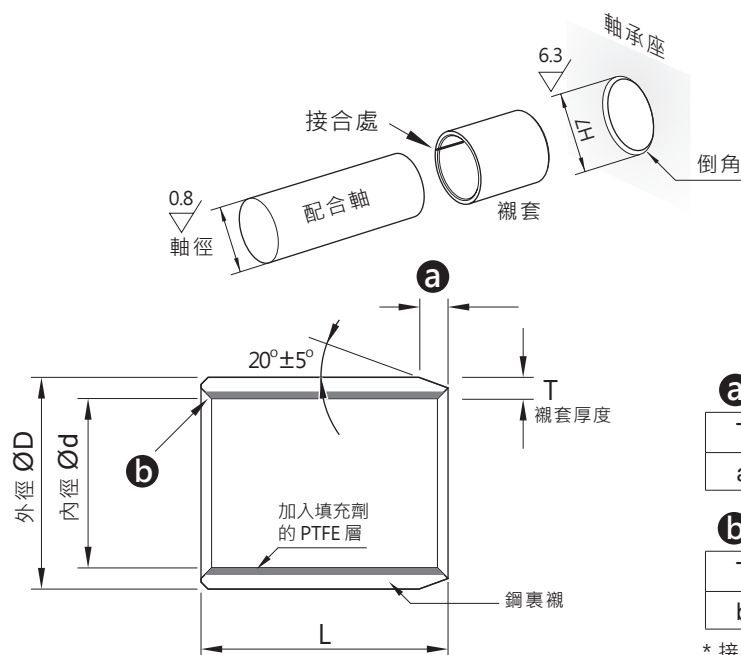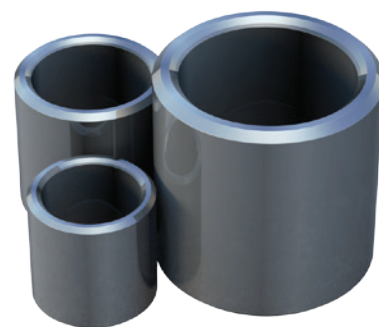

a 外徑倒角 內徑Ø10以上

T	2.0	2.5
a	1.0mm	1.0mm

b 外徑倒角 內徑Ø10以上



T	2.0	2.5
b	C0.5mm	C0.5mm

* 接合處雖然不影響，軸承旋轉，但壓入時避免承受最大負荷之位置。

軸徑		軸承座 H7		內徑		外徑		襯套厚度		長 度 L 公差														壓入後 內徑公差	
尺寸	公差	尺寸	公差	ød	øD	公差	T	公差	12	15	20	25	30	35	40	50	60	70	80	90	95	100			
30	-0.025 -0.046	34	+0.025 0	30	34	+0.090 +0.050	2.0	0 -0.030	3012	3015	3020	3025	3030	3035	3040	3050							+0.085 0		
31	-0.025 -0.050	35		31	35					3115		3125	3130		3140										
32		36		32	36					3215	3220	3225	3230		3240										
35		39		35	39					3512		3520	3525	3530	3535	3540	3550								
38		42		38	42				+0.095 +0.055			3820	3825	3830	3835	3840									
40		44		40	44					4012	4015	4020	4025	4030	4035	4040	4050								
45	-0.025 -0.055	50	+0.030 0	45	50	+0.100 +0.060	2.5	0 -0.040			4520	4525	4530	4535	4540	4550							+0.105 0		
50		55		+0.105 +0.060					5020	5025	5030	5035	5040	5050	5060										
55		60		+0.110 +0.065					5525	5530	5535	5540	5550	5560											
60		65		+0.120 +0.070						6030	6035	6040	6050	6060		6080									
65		70		+0.125 +0.075							6530		6540	6550	6560										
70	+0.035 +0.005	75	+0.035 0	70	75	+0.130 +0.075	2.5	-0.030 -0.080					7030	7035	7040	7050	7060	7070	7080				+0.190 +0.060		
75	80	75		80							7530	7535	7540	7550	7560		7580								
80	85	80		85									8040	8050	8060		8080								
85	90	85		90									8540	8550	8560		8580								
90	95	90		95									9040	9050	9060			9090							
100	+0.035 0	105	+0.040 0	100	105	+0.140 +0.080	2.5	-0.030 -0.080								10050		10070	10050		10095	100100	+0.200 +0.060		
110	115	110		115								11050		11070			11095	110100							
120	125	120		125	+0.145 +0.090									12050		12070			12095	120100					
130	135	130		135											13050			13080			130100				
140	+0.035 -0.005	145		140	145	+0.165 +0.100												14050		14080				140100	
150	+0.035 -0.005	155	+0.040 0	150	155	+0.185 +0.120	2.5	-0.030 -0.080								15050			15080			150100	+0.200 +0.060		
160		165		160	165													16050			16080				160100

自潤軸承系列

LFF DRYMET LF 自潤凸緣襯套

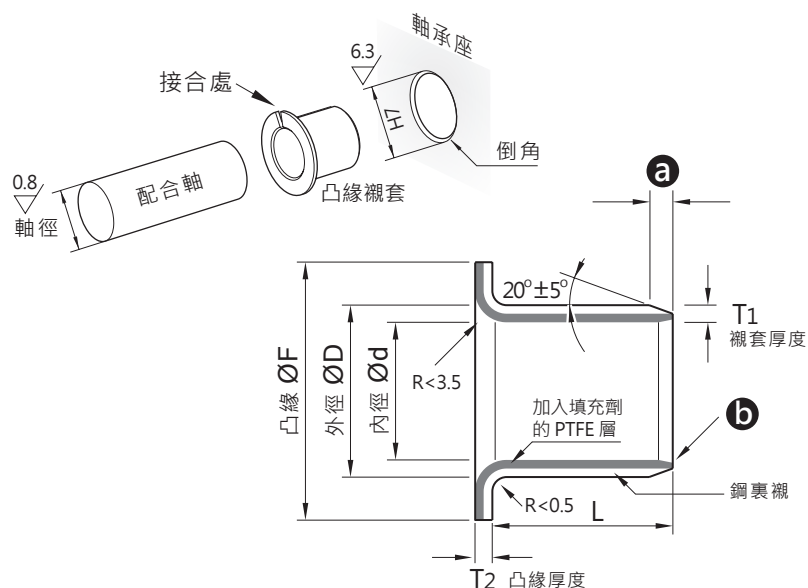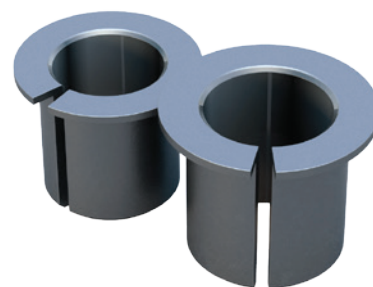

a 外徑倒角 內徑Ø10以上

T1	1.0	1.5	2.0	2.5
a	0.5mm	0.8mm	1.0mm	1.0mm

b 外徑倒角 內徑Ø10以上


T1	1.0	1.5	2.0	2.5
b	C0.3mm	C0.5mm	C0.5mm	C0.5mm

* 內徑Ø10以下,內外徑倒角只去毛邊。

軸徑		軸承座 H7		內徑	外徑	凸 緣			襯套厚度		長 度 L 公差														壓入後 內徑公差										
尺寸	公差	尺寸	公差	ød	øD	øF	公差	T2	公差	T1	公差	3	4	5	6	7	8	10	12	15	20	25	30	40											
3	-0.025 -0.034	4.6	+0.012 +0	3	4.6	7	0 -0.80	0.8		0.8	0	-0.025	0303		0305											+0.062 0									
4	-0.025 -0.037	5.6	+0.015 +0	4	5.6	9														0404		0406													
5																					0504	0505	0506												
6																						0605	0606	0607	0608						+0.065 0				
7																		0707																	
8		10		8	10	15										0806		0808	0810	0812															
9		11		9	11	16													0910																
10		12		10	12	18										1006	1007	1008	1010	1012	1015														
12	-0.025 -0.043	14	+0.018 +0	12	14	20			1.0		1.0	0	-0.025				1206	1207	1208	1210	1212	1215						+0.068 0							
13																							1310		1315										
14																								1410	1412	1415									
15																									1510	1512	1515	1520							
16																										1610		1615	1620						
18				20		18		20						26												1810	1812	1815	1820					+0.071 0	
20	-0.025 -0.046	23	+0.021 +0	20	23	31		0 -0.80	1.5	0	-0.15	1.5	0	-0.030						2010	2012	2015	2020	2025					+0.081 0						
22																										2210	2212	2215	2220						
24																												2415	2420	2425					
25																											2510	2512	2515	2520	2525				
26				30		26	30		38														2615	2620											
28				32		28	32		40													2812	2815	2820											
30	-0.025 -0.050	34	+0.025 +0	30	34	42			2.0		2.0	0	-0.030								3012	3015	3020	3025	3030				+0.085 0						
31																													3125						
32																													3220	3225	3230				
35																										3512		3520	3525	3530	3540				
38				42		38	42							52														3820							
40				44		40	44							54												4012		4020	4025	4030	4040				
45	-0.025 -0.055	50	+0.030 +0	45	50	60			2.5		2.5	0	-0.040									4520	4525	4530	4540			+0.105 0							
50																											5020		5030	5040					
55				60		55	60							70																5530	5540			+0.110 0	
60				65		60	65							75																	6030	6040			

自潤軸承系列

LFW DRYMET LF 自潤墊圈

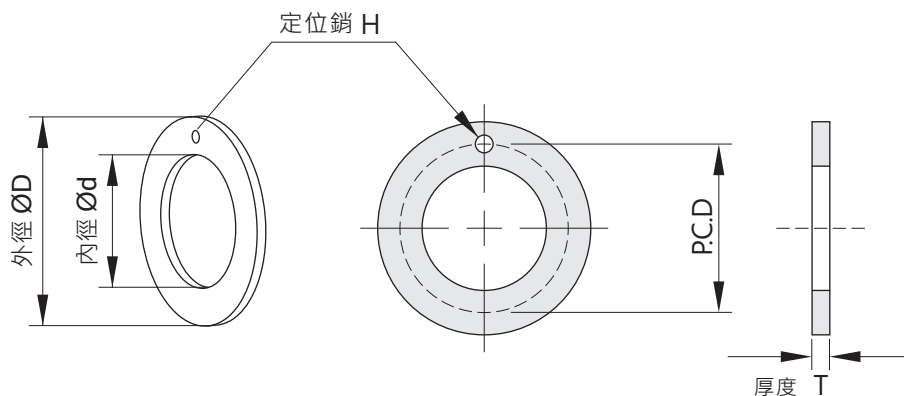

Parts No. 型號	內徑		外徑		厚度		定位銷		定位銷位置	
	ød	公差	øD	公差	T	公差	H	公差	P.C.D	公差
LFW-0815	8	+0.25 0	16	0 -0.25	1.5	-0.03 -0.08	1	+0.30 +0.10	12	±0.12
LFW-1015	10		18				1		14	
LFW-1215	12		24				1.5	18		
LFW-1415	14		26				2	20		
LFW-1615	16		30				2	23		
LFW-1815	18		32				2	25		
LFW-2015	20		36				3	28		
LFW-2215	22		38				3	30		
LFW-2415	24		42				3	33		
LFW-2615	26		44				3	35		
LFW-2815	28		48				4	38		
LFW-3215	32		54				4	43		
LFW-3815	38		62				4	50		
LFW-4215	42		66				4	54		
LFW-4815	48		74		4		61			
LFW-5215	52		78		2.0		4	65		